aiwa SERVICE

HV-FX7750 LE
HV-FX5700 LE
HV-FX990 LE
HV-GX935 LE
HV-GX915 LE

SERVICE MANUAL

STEREO VIDEO CASSETTE RECORDER

BASIC VIDEO MECHANISM
: D33K-4HF/PAL(6721R-0250B)<7750,5700>
: D33K-4HD/PAL(6721R-0230B)<990>
: D33K-2HD/PAL(6721R-0212A)<935,915>

Replace this Service Manual with "Revision Publishing" when it is issued.

aiwa

S/M Code No. 09-007-347-2T1

SIMPLE DATA

ELECTRICAL MAIN PARTS LIST

DESCRIPTIONで判断できない物は "REFERENCE NAME LIST" を参照してください。
If can't understand for Description please kindly refer to "REFERENCE NAME LIST".

REF. NO	PART NO.	KANRI NO.	DESCRIPTION
IC			
	S2-309-024-040		SENSORLTV-817B PHOTO COU
	SI-SS4-310-00A		IC,KA431AZ
⚠	SA-400-811-220		KA7552
	SI-TO1-238-00E		IC,TA1238F
	SI-SA7-159-80A		IC,LA71598M
	SI-HI6-432-19A		IC,HD6432197XA04F
	SI-SS3-082-00A		IC,KA3082
	SI-AL2-416-00B		IC,AT24C16-10PC
	SI-KE7-031-00A		IC,KIA7031P
	87-001-196-010		IC,KIA7042P
	SI-NE1-631-10A		IC,UPD16311GC-AB6
	SI-IT3-417-00B		IC,MSP3417D-QG<57,77>
	SI-SA7-479-30A		IC,LC74793<77>
	SI-PH9-605-00A		IC,TDA9605H<57,77>
	SI-MT1-443-00A		IC,MM1443XJ
TRANSISTOR			
	ST-R12-730-9AA		TR,KTA1273-TP-Y
	ST-R32-050-9AB		TR,KTC3205-TP-Y
	ST-R12-680-9BA		TR,KTA1268-BL
	S7-A30-293-010		TR,KTC2804-Y
	S3-1KR-A10-3M0		TR,KRA103M-TP
	ST-R10-030-9AA		TR,KSR1003
	ST-R31-990-9AF		TR,KTC3199-BL
	SK-RC1-01M-000		TR,KRC101M
	ST-R12-670-9AC		TR,KTA1267-GR
	ST-R53-430-9BA		TR,2SC5343-L
	ST-R10-300-9AE		TR,KRC103M
	ST-R19-800-9CA		TR,2SA1980G
	ST-R53-440-9AA		TR,2SC5344Y
	ST-R12-010-9AC		TR,SRC1201 4.7K,
DIODE			
	SD-D01-000-9CA		DIODE,EG01CW
	SD-R18-020-9AA		DIODE,ERA18-02KFRB
	SD-R10-400-9BA		DIODE,RL104F
	87-020-215-010		DIODE,ERC81-004L22
	SD-R20-200-0AB		DIODE,HER202 BK
	SD-D20-700-0AA		DIODE,2A07
	SD-S14-148-9BB		DIODE,1N4148
	SD-R10-400-9AB		DIODE,RL104
MAIN C.B			
C101	S6-240-88K-000		CAP,0.1UF-275VAC
C102	S6-240-88K-000		CAP,0.1UF-275VAC
C103	SC-E47-6CU-611		CAP,E 47UF-400V
C105	87-016-375-010		CAP,0.01UF-630V
C106	S6-240-87B-000		CAP,100P-1KV
C112	87-012-379-010		CAP,3300PF-400V
C113	SA-1B3-0KH-2M0		CAP,220PF-400V
C115	87-010-408-040		CAP,E 47UF-50V
C116	87-010-237-910		CAP,E 1000UF-16V
C117	87-010-375-080		CAP,E 330-10V
C118	87-010-248-080		CAP,E 220-10V
C119	87-010-408-040		CAP,E 47UF-50V
C120	87-010-387-010		CAP,E 470UF-25V KME
C121	87-010-387-080		CAP,E 470UF-25V
C124	87-015-681-080		CAP,E 10-16V
C144	87-010-408-040		CAP,E 47UF-50V
C151	87-015-681-080		CAP,E 10-16V
C153	87-015-681-080		CAP,E 10-16V
C201	87-010-402-040		CAP,E 2.2-50V
C203	87-010-400-080		CAP,E 0.47-50V
C206	87-010-400-080		CAP,E 0.47-50V
C208	87-015-695-080		CAP,E 1.0-50V
C213	87-010-402-040		CAP,E 2.2-50V
C303	87-015-695-080		CAP,E 1.0-50V
C304	87-015-684-080		CAP,E 47-16V
C310	87-015-698-080		CAP,E 4.7-50V
C315	87-015-681-080		CAP,E 10-16V
C316	87-015-681-080		CAP,E 10-16V
C318	87-015-695-080		CAP,E 1.0-50V
C320	87-015-695-080		CAP,E 1.0-50V
C322	87-015-684-080		CAP,E 47-16V
C325	87-015-695-080		CAP,E 1.0-50V
C326	87-015-681-080		CAP,E 10-16V
C327	87-015-681-080		CAP,E 10-16V
C333	87-015-681-080		CAP,E 10-16V
C337	87-015-698-080		CAP,E 4.7-50V
C339	87-015-698-080		CAP,E 4.7-50V
C346	87-015-684-080		CAP,E 47-16V
C348	87-015-695-080		CAP,E 1.0-50V
C354	87-015-684-080		CAP,E 47-16V
C358	87-015-695-080		CAP,E 1.0-50V
C374	87-015-684-080		CAP,E 47-16V
C376	87-015-681-080		CAP,E 10-16V
C377	87-015-681-080		CAP,E 10-16V
C379	87-010-403-040		CAP,E 3.3-50V
C386	87-010-552-040		CAP,E 22-16V
C389	87-015-698-080		CAP,E 4.7-50V
C390	87-010-552-040		CAP,E 22-16V
C392	87-010-408-040		CAP,E 47UF-50V
C500	87-016-455-080		CAP,E 470UF-6.3V<77>
C500	87-016-040-080		CAP,0.047F-5.5V<EXCEPT 77>
C502	87-015-684-080		CAP,E 47-16V
C503	87-016-088-040		CAP,E 220-6.3V
C504	87-016-088-040		CAP,E 220-6.3V
C505	87-015-684-080		CAP,E 47-16V
C510	87-015-684-080		CAP,E 47-16V
C523	87-010-552-040		CAP,E 22-16V
C524	87-015-684-080		CAP,E 47-16V
C526	87-016-130-080		CAP,47-25V
C530	87-015-681-080		CAP,E 10-16V
C534	87-015-698-080		CAP,E 4.7-50V
C535	87-015-698-080		CAP,E 4.7-50V
C546	87-016-130-080		CAP,47-25V
C561	87-016-088-040		CAP,E 220-6.3V
C591	87-016-088-040		CAP,E 220-6.3V
C5A5	87-015-695-080		CAP,E 1.0-50V
C5F2	87-010-408-040		CAP,E 47UF-50V
C5F3	SC-E22-73D-638		CAP,E 220-10V
C5P9	87-015-698-080		CAP,E 4.7-50V
C701	87-015-698-080		CAP,E 4.7-50V
C703	87-015-681-080		CAP,E 10-16V
C704	87-015-684-080		CAP,E 47-16V
C706	87-016-455-080		CAP,E 470UF-6.3V
C7S1	87-010-265-080		CAP,E 33-16V
C7V1	87-015-684-080		CAP,E 47-16V<77>
C7V6	87-015-698-080		CAP,E 4.7-50V<77>
C7V7	SC-N10-50K-948		CAP,1UF-50V<77>
C7V8	87-015-695-080		CAP,E 1.0-50V<77>
C806	87-015-698-080		CAP,E 4.7-50V<57,77>
C807	87-015-698-080		CAP,E 4.7-50V<57,77>
C810	87-015-681-080		CAP,E 10-16V<57,77>
C811	87-015-681-080		CAP,E 10-16V<57,77>
C813	87-015-681-080		CAP,E 10-16V<57,77>
C814	87-015-681-080		CAP,E 10-16V<57,77>
C815	87-015-681-080		CAP,E 10-16V<57,77>
C816	87-015-681-080		CAP,E 10-16V<57,77>
C817	87-015-681-080		CAP,E 10-16V<57,77>
C818	87-015-698-080		CAP,E 4.7-50V<57,77>
C819	87-015-681-080		CAP,E 10-16V<57,77>
C821	87-015-684-080		CAP,E 47-16V<57,77>
C822	87-015-681-080		CAP,E 10-16V<57,77>
C823	87-015-681-080		CAP,E 10-16V<57,77>
C824	87-015-681-080		CAP,E 10-16V<57,77>

REF. NO	PART NO.	KANRI NO.	DESCRIPTION
C825	87-015-684-080		CAP,E 47-16V<57,77>
C827	87-015-681-080		CAP,E 10-16V<57,77>
C828	87-015-684-080		CAP,E 47-16V<57,77>
C832	87-015-684-080		CAP,E 47-16V
C835	87-010-400-080		CAP,E 0.47-50V<57,77>
C902	87-016-455-080		CAP,E 470UF-6.3V
C912	87-016-455-080		CAP,E 470UF-6.3V
C956	87-015-695-080		CAP,E 1.0-50V
C960	87-015-695-080		CAP,E 1.0-50V
C961	87-015-695-080		CAP,E 1.0-50V
C962	87-015-695-080		CAP,E 1.0-50V
C963	87-010-552-040		CAP,E 22-16V
C964	87-015-695-080		CAP,E 1.0-50V
C9A1	87-015-695-080		CAP,E 1.0-50V<91,93,99>
C9A2	87-015-695-080		CAP,E 1.0-50V<91,93,99>
C9A3	87-015-695-080		CAP,E 1.0-50V<91,93,99>
C9A5	87-015-681-080		CAP,E 10-16V<91,93,99>
C9A6	87-015-681-080		CAP,E 10-16V<91,93,99>
C9A7	87-015-681-080		CAP,E 10-16V<91,93,99>
C9F7	87-015-695-080		CAP,E 1.0-50V<93,77>
CS501	S6-00R-DB0-04C		SW,MPU10252MLB4 MIC
DIG501	S3-02R-1N0-03A		LEVEL METER DH 9MT168GK<57,77>
DIG501	S3-02R-1N0-03B		LEVEL METER 7MT229GK<91,93,99>
ES501	S9-31R-001-6A0		SENSOR END
ES502	S9-31R-001-6A0		SENSOR END
⚠F101	S5-850-11T-000		FUSE,1600MA 250V
⚠F102	87-001-196-010		ICP-N10 T104
⚠FE1141	ST-F38-002-0AA		TR,SSSS3N80A
⚠FH01	S5-860-08B-000		HOLDER,FUSE CLIP
⚠FH02	S5-860-08B-000		HOLDER,FUSE CLIP
FL301	S6-330-32K-000		COIL,OSC BIAS 1CHIP 5V
JK801	S6-12R-C00-2C0		JACK,RCA RCA-208C-06<57,77>
JK901	S6-20R-M00-02A		SOCKET 2F-21P
L102	S6-161-45H-000		FILTER SHT LFS2020V4-04350
L103	S6-330-88G-000		COIL,CHOCK TP 5MM
L104	S6-330-88G-000		COIL,CHOCK TP 5MM
L105	87-003-152-080		INDUCTOR,100M 2.3-3.4-5
L301	87-005-196-080		COIL,10UH
L302	87-003-286-080		COIL,56 2.3-3.4-5
L303	87-003-152-080		INDUCTOR,100M 2.3-3.4-5<99,57,77>
L303	87-003-286-080		COIL,56 2.3-3.4-5<91,93>
L305	87-005-196-080		COIL,10UH
L307	87-005-196-080		COIL,10UH
L308	87-005-440-080		COIL,47M 6-6-5
L310	87-005-196-080		COIL,10UH
L503	87-005-196-080		COIL,10UH
L504	87-005-196-080		COIL,10UH
L505	87-005-196-080		COIL,10UH
L506	87-005-686-080		COIL,15UH
L5F1	87-005-196-080		COIL,10UH
L5S1	87-003-148-080		INDUCTOR,33
L702	87-005-196-080		COIL,10UH
L703	87-005-196-080		COIL,10UH
L704	87-003-145-080		INDUCTOR,8.2
L7V1	87-005-196-080		COIL,10UH<77>
L801	87-005-196-080		COIL,10UH
L8R1	87-003-152-080		INDUCTOR,100M 2.3-3.4-5<57,77>
L8R2	87-003-152-080		INDUCTOR,100M 2.3-3.4-5<57,77>
L901	87-003-152-080		INDUCTOR,100M 2.3-3.4-5
L904	87-003-152-080		INDUCTOR,100M 2.3-3.4-5
L905	S6-360-04C-000		COIL,BFS3550R2FD8
L906	87-003-152-080		INDUCTOR,100M 2.3-3.4-5
L907	S6-360-04C-000		COIL,BFS3550R2FD8
L911	87-003-152-080		INDUCTOR,100M 2.3-3.4-5
L912	87-003-152-080		INDUCTOR,100M 2.3-3.4-5
L914	87-003-152-080		INDUCTOR,100M 2.3-3.4-5
L916	87-003-152-080		INDUCTOR,100M 2.3-3.4-5
LD501	S9-31R-001-7A0		LED
MS501	S6-00R-PY0-01B		SW,MMS00420ZMBO MIC
P3D01	S5-612-34W-000		GF120-10S-TS-A LGC 10P MP<57,77>

REF. NO	PART NO.	KANRI NO.	DESCRIPTION
P3D01	S5-612-34Y-000		CONN,6P<99>
P3D01	S5-612-34Z-000		CONN,3P<91,93>
P3D02	S6-30R-5S0-08E		CONN,6P
P3D03	S5-612-51B-000		GB201-2P-TS-B(LGC) P
PMC01	S6-30R-2P0-05C		CONN,8P 2MM
PMD01	S5-612-34V-000		GF120-07S-TS LGC 7P SP
PMK01	S5-618-43D-000		CONN,TUC-P05P 5P
PMK02	S6-724-34M-000		CONN ASSY 10P-150<93,77>
PMK02	S6-724-34B-000		CONN ASSY 5P-150<91,99,57>
PML01	S6-30R-2S0-11A		CONN,2P
⚠PW101	S5-612-92B-000		GP390 LGC 3P STRAIG P
R101	S6-140-07R-000		RES,2.7-2W
R149	87-022-574-010		RES,FIX O 0.47-2W
R/C501	S7-12R-293-8GA		REMOCON RECEIVER
RS501	S5-00R-AB0-02A		SENSOR GP1S566
RS502	S5-00R-AB0-02A		SENSOR GP1S566
⚠T101	S6-420-23U-000		TRANSFORMER,SMPS SJE-023U
TU701	S7-00R-PL0-1A0		TUNER TADC-S101D
W101	87-005-440-080		COIL,47M 6-6-5
X201	S2-02R-242-8AE		X'TAL,H49U TAEIL 4286230H
X301	S2-02R-244-3AE		CRYSTAL,STANDARD H49U
X501	S2-02R-310-01F		X'TAL,10.0000
X502	S5-290-01K-000		X'TAL,32.768KHZ
X503	S2-02R-317-71E		X'TAL,17.734476MHZ
ZD104	SD-Z56-260-9AA		ZENER,GDZJ5.6B 26MM TP
ZD141	SD-Z22-000-9ED		ZENER,MTZ22B
ZD142	87-A40-458-080		ZENER,MTZ18B
ZD151	SD-Z13-260-9AB		ZENER,GDZJ13A 26MM
ZD501	SD-Z68-260-9AB		ZENER,GDZJ6.8C
ZD503	SD-Z68-260-9AB		ZENER,GDZJ6.8C
ZD701	SD-Z33-260-9AA		ZENER,GDZJ33B 26MM TP
ZD801	SD-Z56-260-9AA		ZENER,GDZJ5.6B 26MM TP
ZD802	SD-Z56-260-9AA		ZENER,GDZJ5.6B 26MM TP
ZD803	SD-Z13-260-9AB		ZENER,GDZJ13A 26MM<57,77>
ZD804	SD-Z13-260-9AB		ZENER,GDZJ13A 26MM<57,77>
ZD805	SD-Z51-000-9AJ		ZENER,GDZJ5.1B TP
ZD805	SD-Z51-000-9AJ		ZENER,GDZJ5.1B TP

KEY1 C.B

PKM01	S5-618-44D-000		CONN,5P
SW905	S5-562-19B-000		SW,SKHV10910B<91,93,99>
SW905	S5-562-82C-000		SW,SKQNQED ALPS 5MM<57,77>
SW906	S5-562-19B-000		SW,SKHV10910B<91,93,99>
SW906	S5-562-82C-000		SW,SKQNQED ALPS 5MM<57,77>
SW907	S5-562-19B-000		SW,SKHV10910B<91,93,99>
SW907	S5-562-82C-000		SW,SKQNQED ALPS 5MM<57,77>
SW908	S5-562-19B-000		SW,SKHV10910B<91,93,99>
SW908	S5-562-82C-000		SW,SKQNQED ALPS 5MM<57,77>
SW909	S5-562-19B-000		SW,SKHV10910B<91,93,99>
SW909	S5-562-82C-000		SW,SKQNQED ALPS 5MM<57,77>
SW910	S5-562-19B-000		SW,SKHV10910B<91,93,99>
SW910	S5-562-82C-000		SW,SKQNQED ALPS 5MM<57,77>
SW911	S5-562-19B-000		SW,SKHV10910B<91,93,99>
SW911	S5-562-82C-000		SW,SKQNQED ALPS 5MM<57,77>
SW912	S5-562-19B-000		SW,SKHV10910B<91,93,99>

KEY2 C.B

BD981	S6-360-04C-000		COIL,BFS3550R2FD8<93,77>
JK901	S5-720-34S-000		JACK,ST 2P(YL)<93,77>
JK902	S5-720-34R-000		JACK,ST 2P(WHT)<93,77>
JK903	S5-720-34Q-000		JACK,ST 2P(RED)<77>
L901	87-003-152-080		INDUCTOR,100M 2.3-3.4-5<77>
L902	87-003-152-080		INDUCTOR,100M 2.3-3.4-5<93,77>
LE901	SD-L53-110-0AA		LED,SG5311(GRN)<91,93,99>
LED902	SD-L53-110-0AA		LED,SG5311(GRN)<57,77>
PKM02	S5-610-36I-000		CONN,8283-1012 WH ELCO<93,77>
PKM02	S5-610-36D-000		MA V 8283-0512 WH ELCO<91,99,57>

REF. NO	PART NO.	KANRI NO.	DESCRIPTION
SW901	S5-562-82C-000		SW,SKQNQED ALPS 5MM<57,77>
SW902	S5-562-82C-000		SW,SKQNQED ALPS 5MM<57,77>
SW903	S5-562-19B-000		SW,SKHV10910B<91,93,99>
SW903	S5-562-82C-000		SW,SKQNQED ALPS 5MM<57,77>
SW904	S5-562-19B-000		SW,SKHV10910B<91,93,99>
SW904	S5-562-82C-000		SW,SKQNQED ALPS 5MM<57,77>

NICAM C.B

C751	87-015-684-080		CAP,E 47-16V<57,77>
C757	87-015-684-080		CAP,E 47-16V<57,77>
C758	87-015-681-080		CAP,E 10-16V<57,77>
C759	87-015-681-080		CAP,E 10-16V<57,77>
C762	SC-Q39-21N-409		CAP,0.0039U 100V<57,77>
C763	SC-Q39-21N-409		CAP,0.0039U 100V<57,77>
C766	87-010-403-040		CAP,E 3.3-50V<57,77>
C769	87-015-681-080		CAP,E 10-16V<57,77>
C770	87-015-684-080		CAP,E 47-16V<57,77>
L751	87-005-196-080		COIL,10UH<57,77>
L752	87-005-196-080		COIL,10UH<57,77>
L753	87-005-196-080		COIL,10UH<57,77>
L754	87-003-129-080		INDUCTOR,6800UH<57,77>
L755	87-003-129-080		INDUCTOR,6800UH<57,77>
P7M01	S5-618-48F-000		CABLE 9P<57,77>
P7M02	S5-618-48F-000		CABLE 9P<57,77>
X751	S5-290-219-000		X'TAL 18.432MHZ<57,77>

TYPE	MODEL NAME	SUFFIX
<77>	HV-FX7750	LE
<57>	HV-FX5700	LE
<99>	HV-FX990	LE
<93>	HV-GX935	LE
<91>	HV-GX915	LE

SCHEMATIC DIAGRAM-1 (POWER/TUNER/NICAM SECTION) <HV-FX7750/5700>

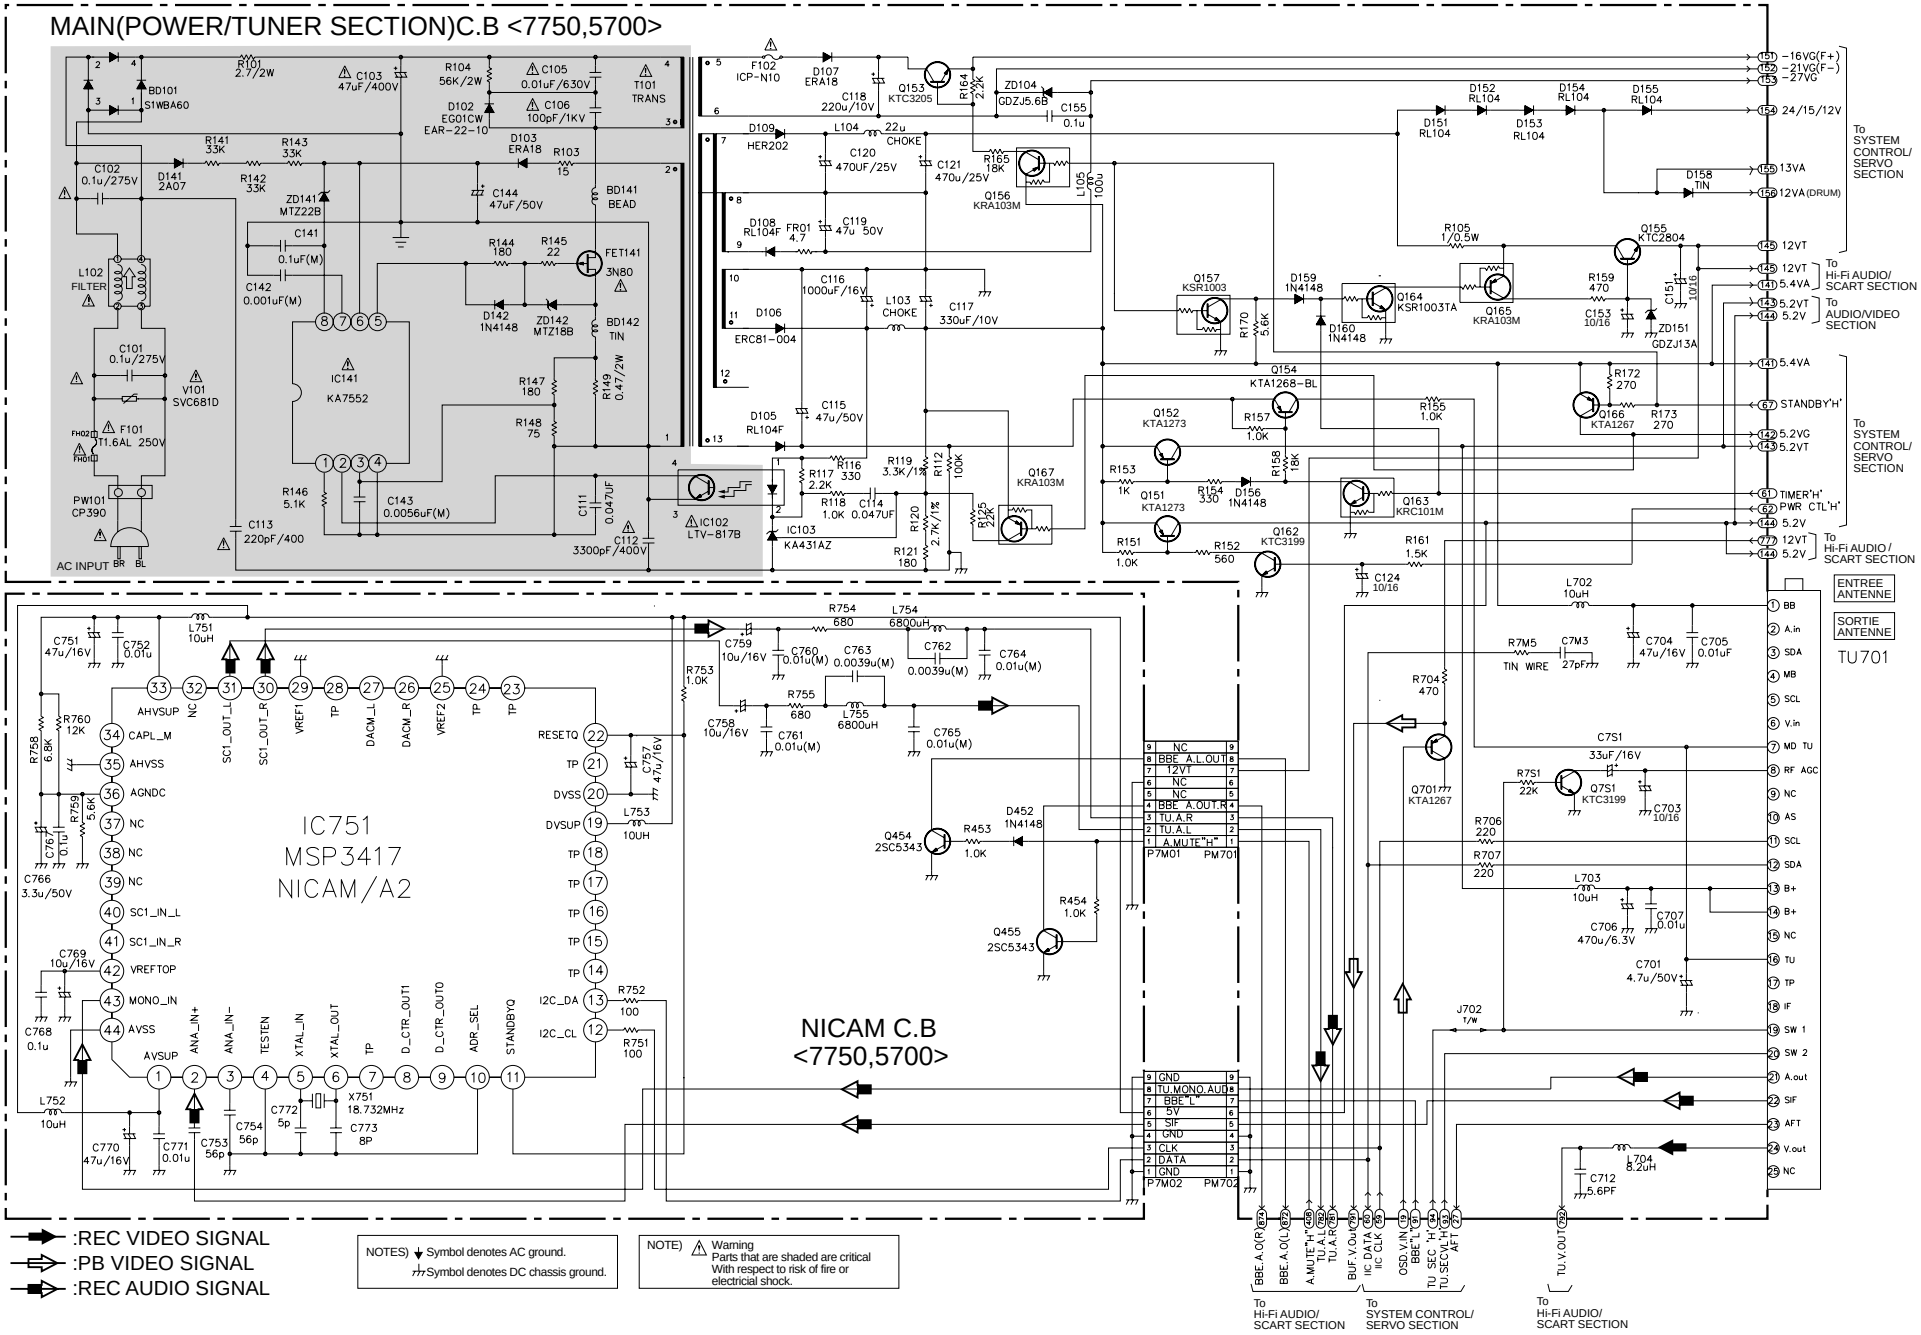

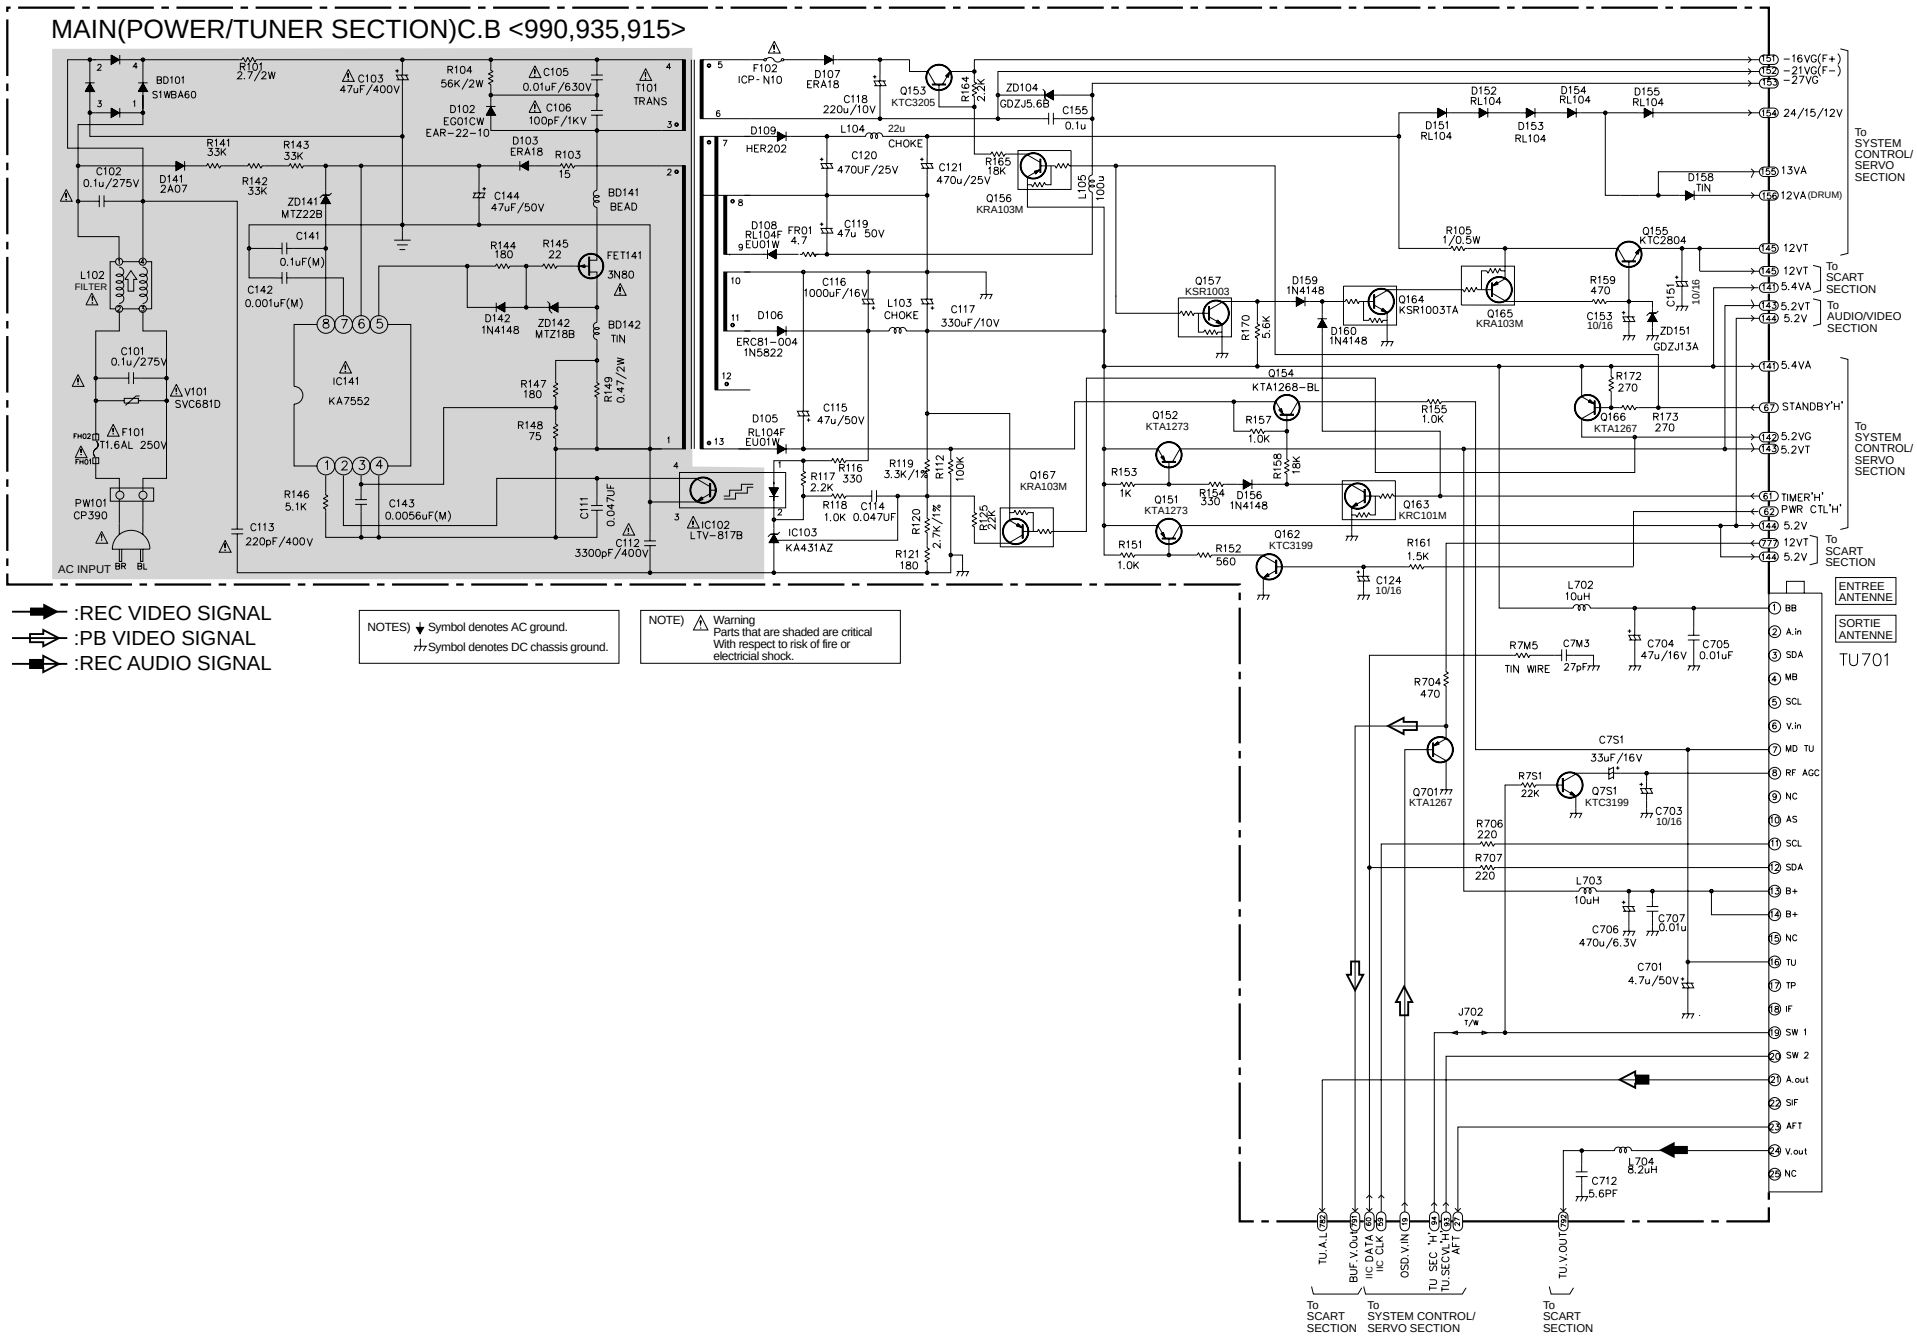
MAIN(POWER/TUNER SECTION)C.B <990,935,915>
:REC VIDEO SIGNAL
:PB VIDEO SIGNAL
:REC AUDIO SIGNAL
NOTES) Symbol denotes AC ground.
Symbol denotes DC chassis ground.
NOTE) Warning
Parts that are shaded are critical With respect to risk of fire or electricial shock.
AC INPUT
IC141 KA7552
IC102 LTV-817B
IC103 KA431AZ
TU701
ENTREE ANTENNE
SORTIE ANTENNE
To SYSTEM CONTROL/ SERVO SECTION
To SCART SECTION
To AUDIO/VIDEO SECTION
To SCART SECTION
To SYSTEM CONTROL/ SERVO SECTION
To SCART SECTION
To SYSTEM CONTROL/ SERVO SECTION
To SCART SECTION

SCHEMATIC DIAGRAM-3 (AUDIO/VIDEO SECTION)

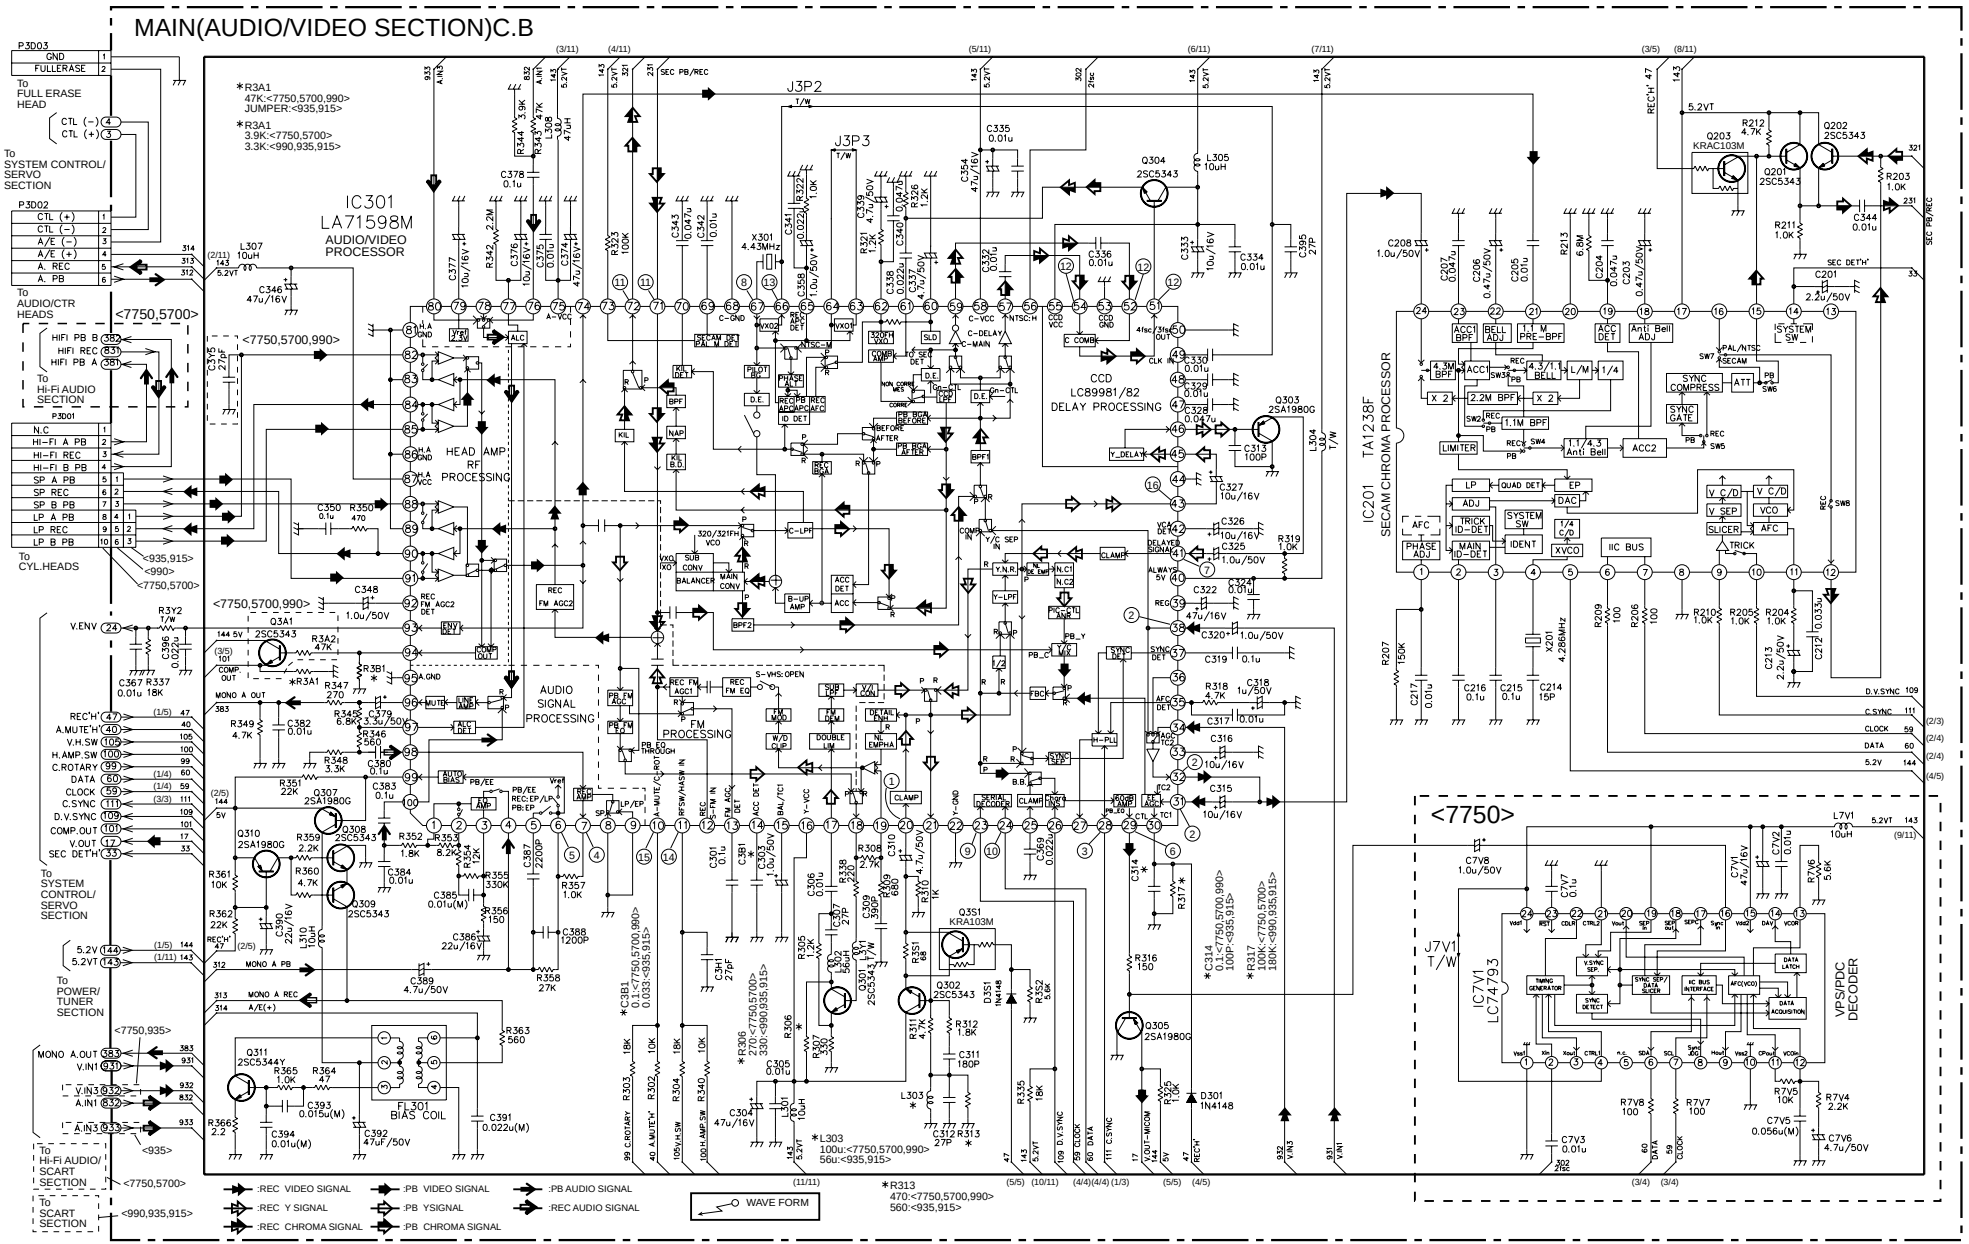

SCHEMATIC DIAGRAM-4 (Hi-Fi AUDIO SCART SECTION) <HV-FX7750/5700>

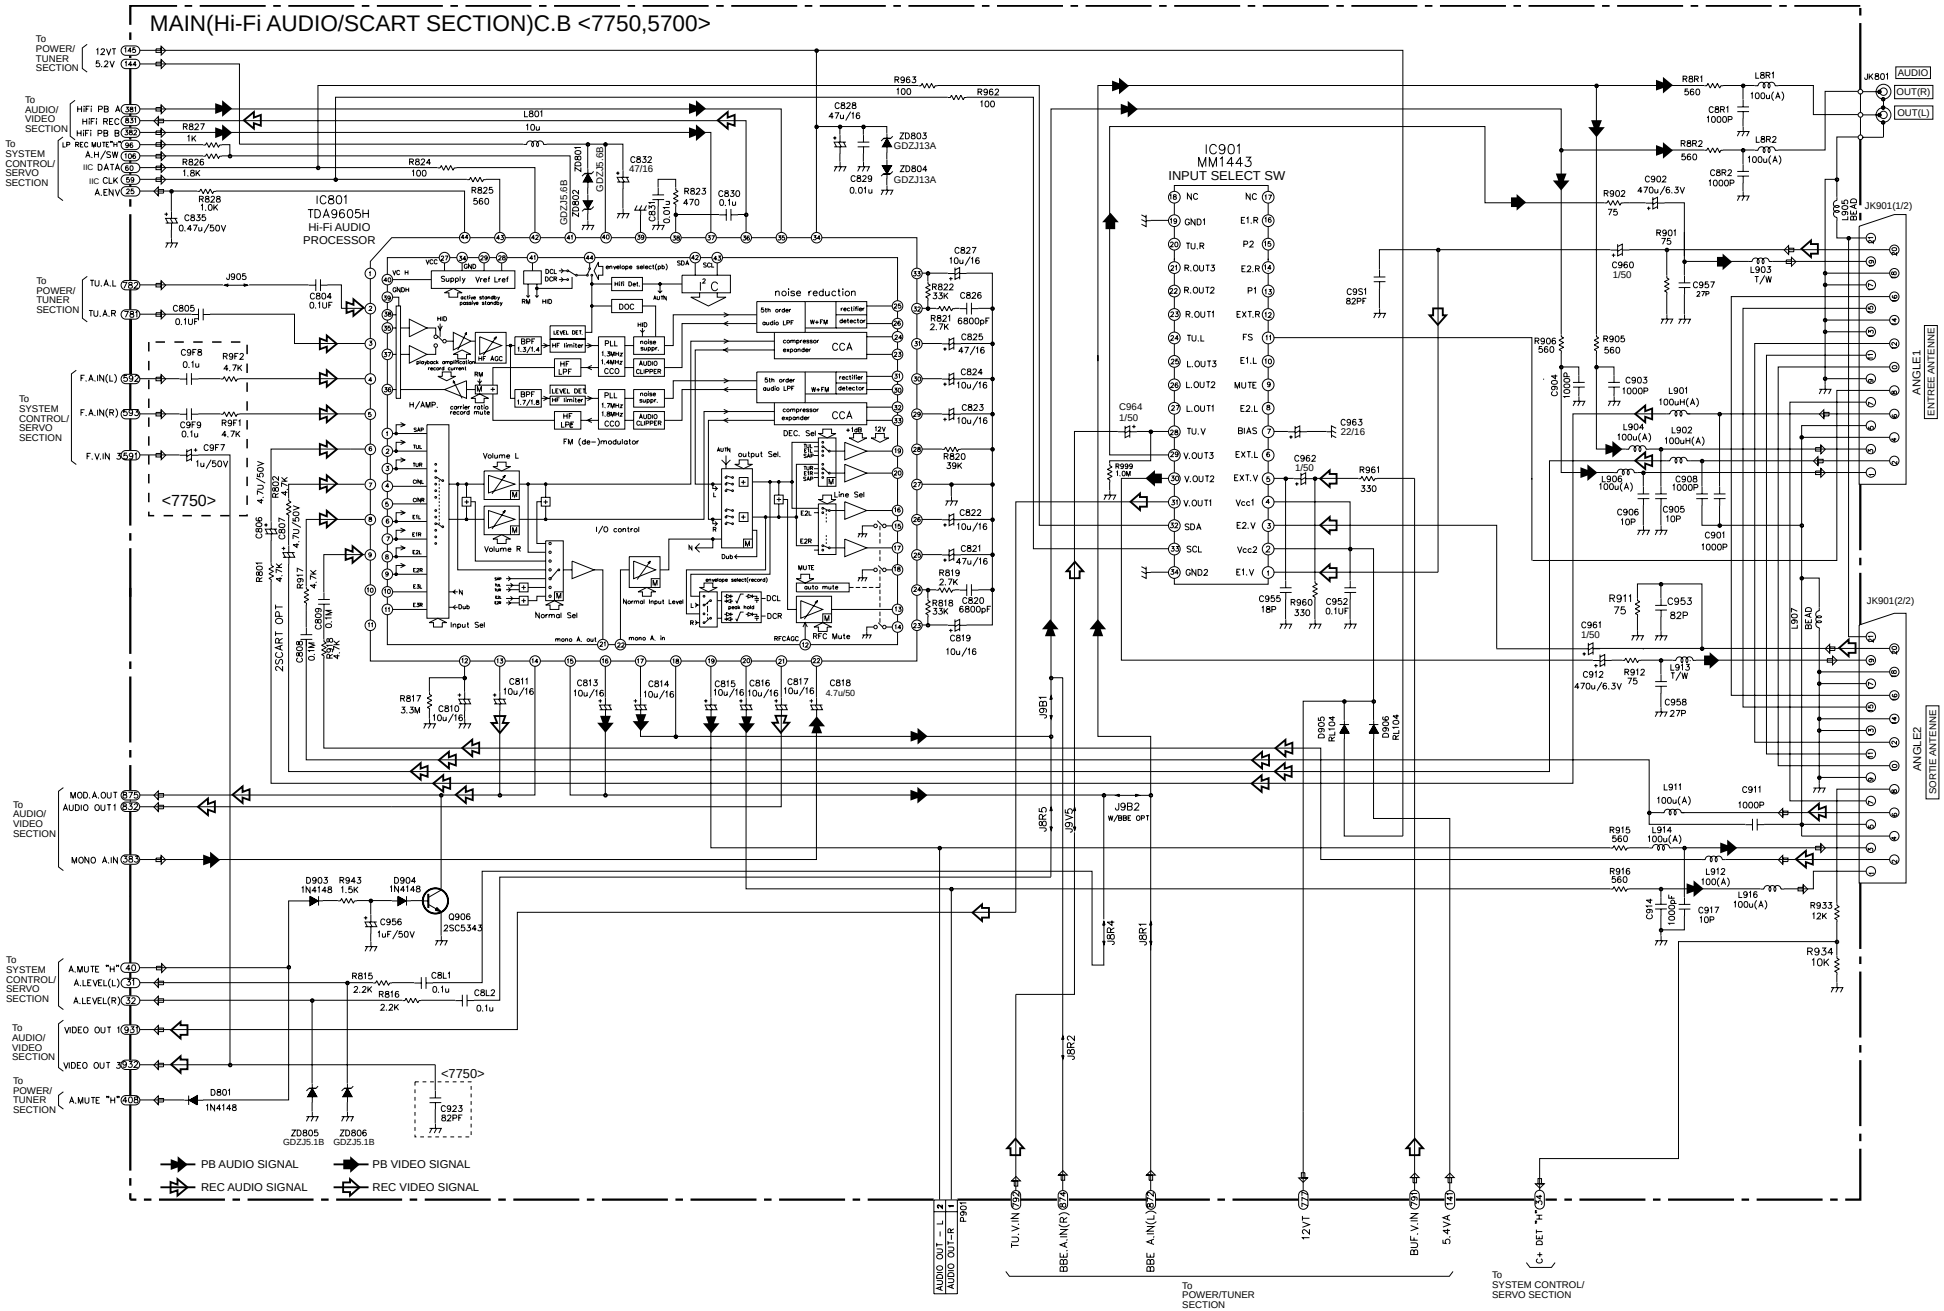

SCHEMATIC DIAGRAM5 (SCART SECTION) <HV-FX990/GX935/915>

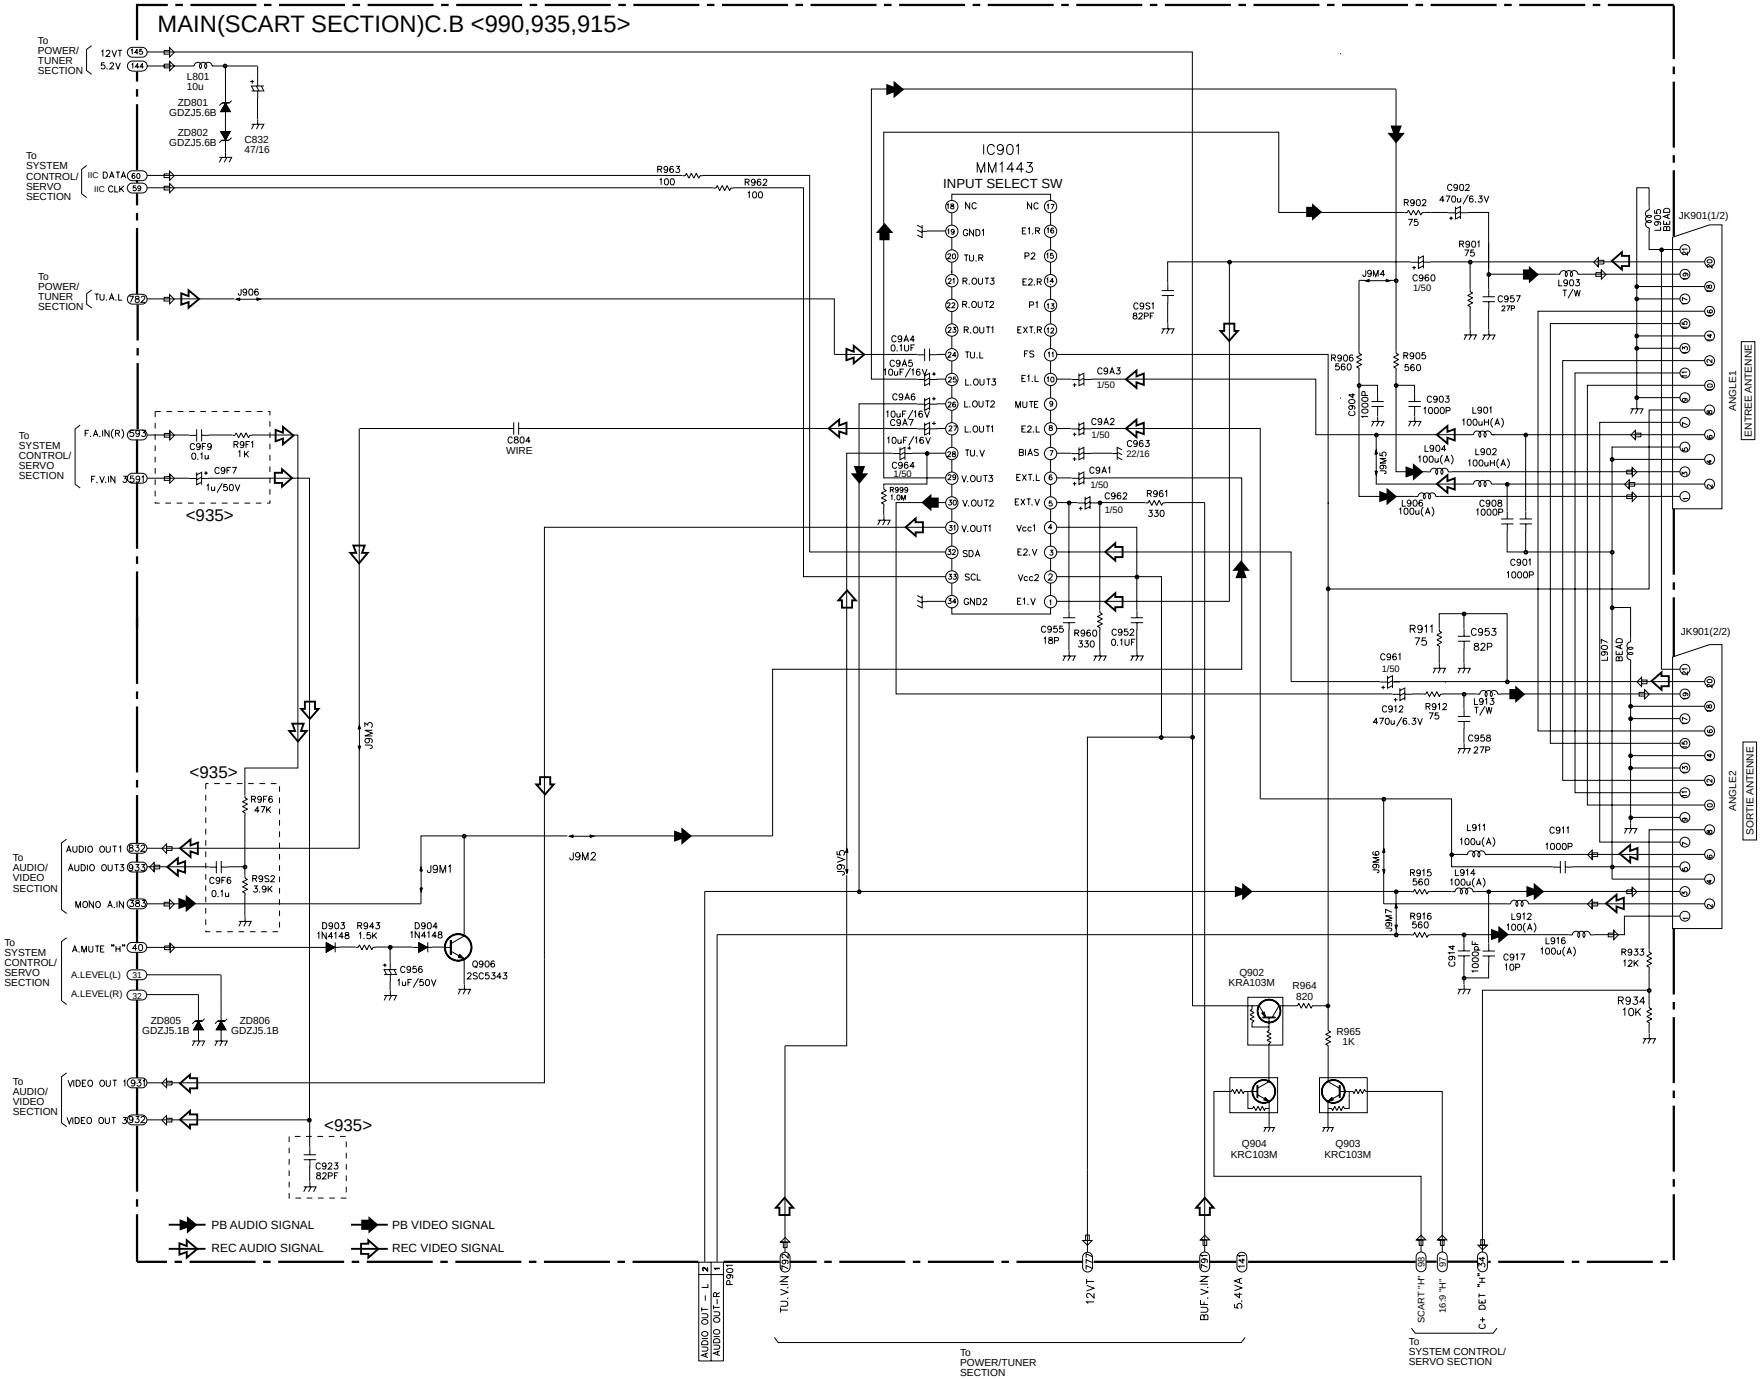

SCHEMATIC DIAGRAM-6 (SYSTEM CONTROL/SERVO SECTION) <HV-FX7750/5700>

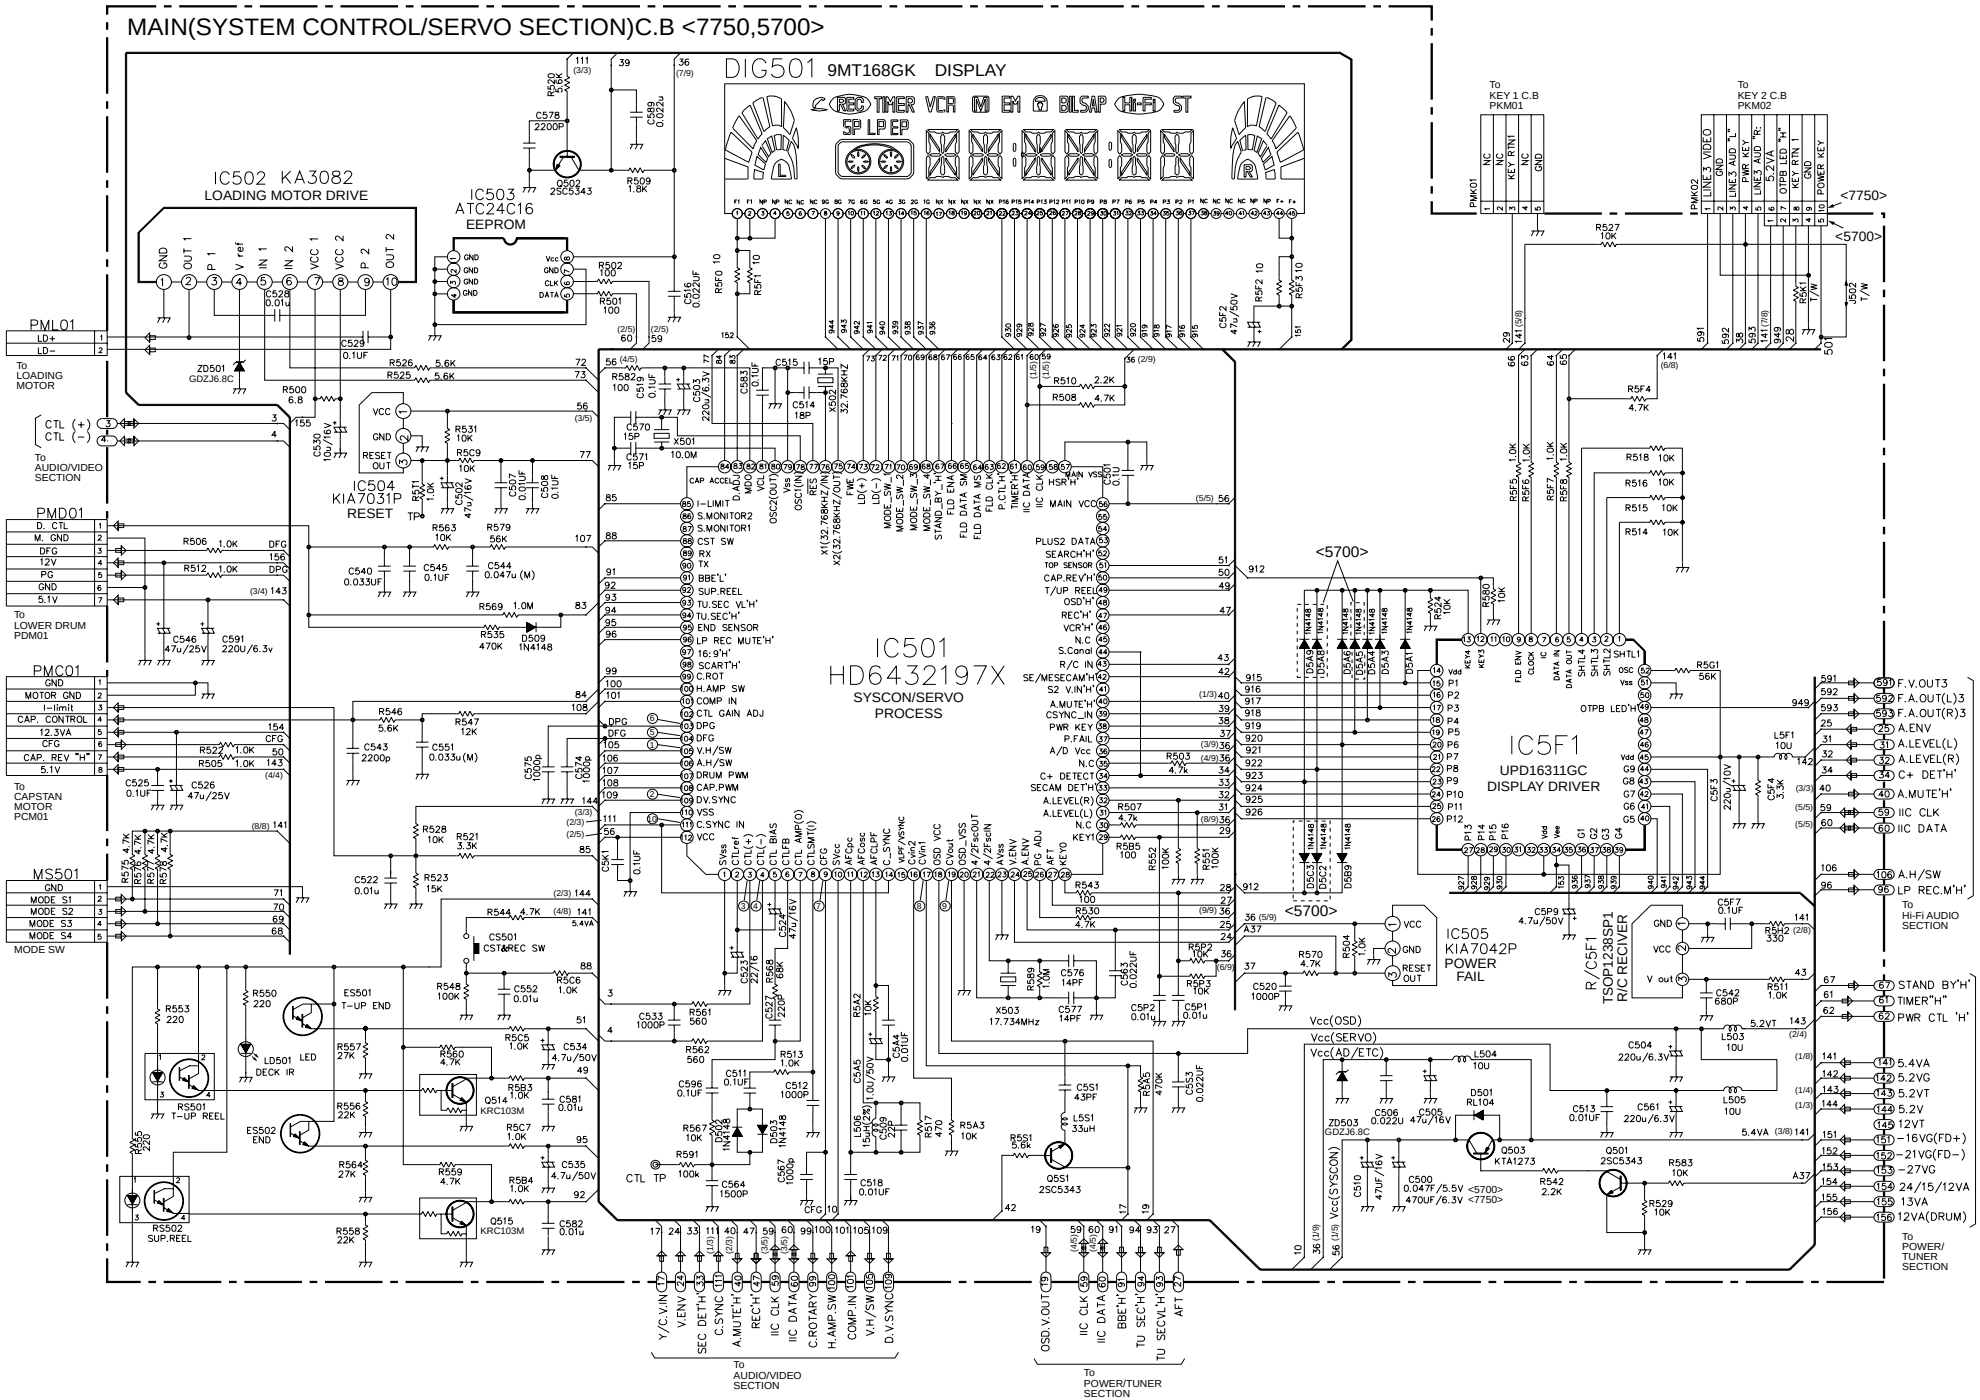

SCHEMATIC DIAGRAM-7 (SYSTEM CONTROL/SERVO SECTION) <HV-FX990/GX935/915>

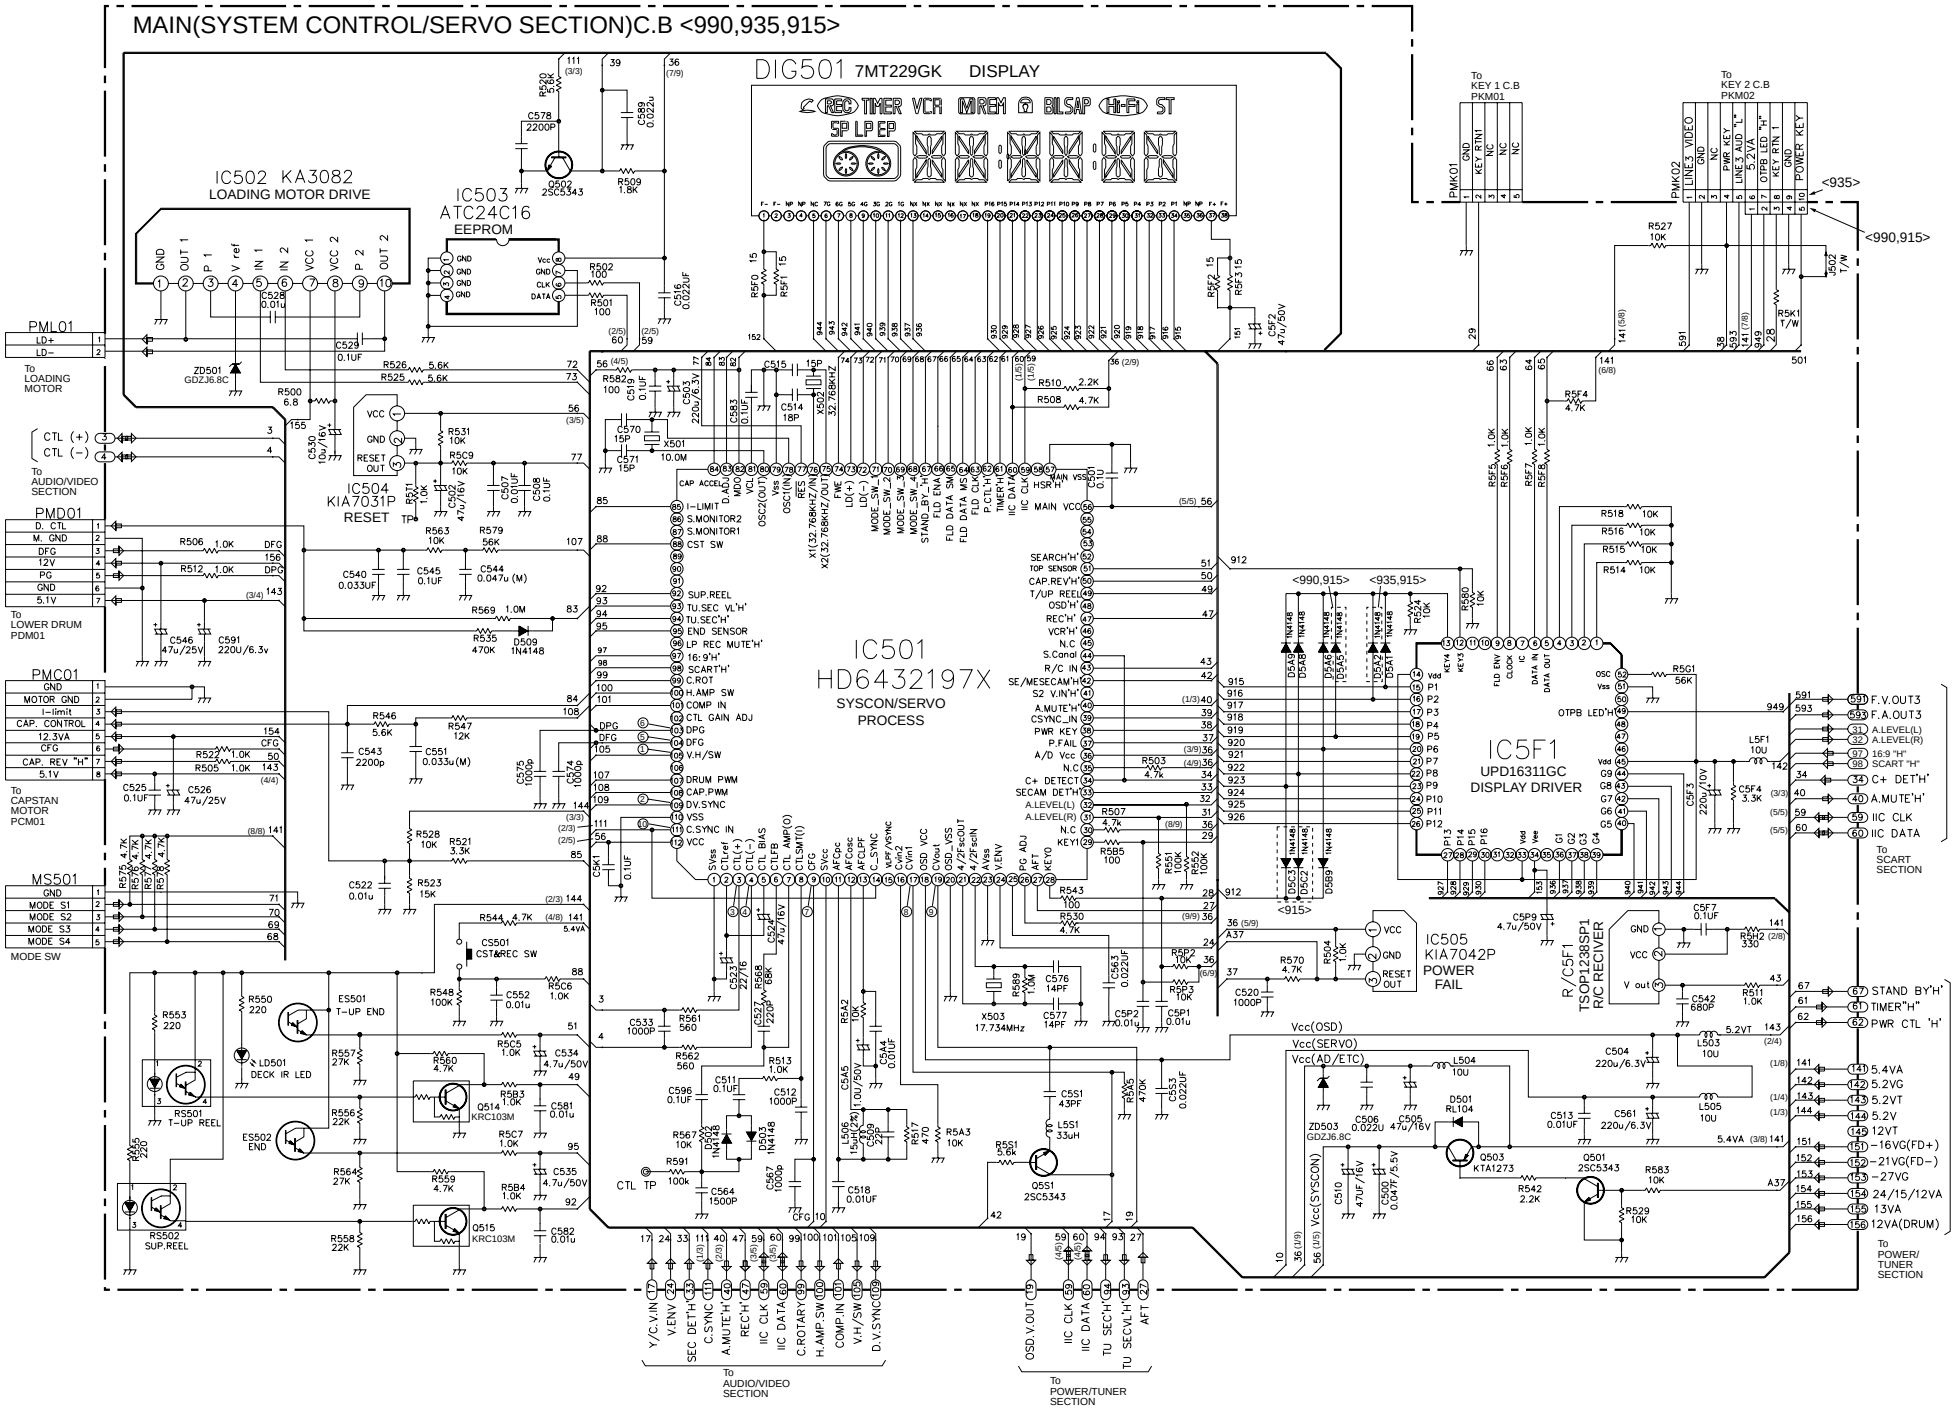

SCHEMATIC DIAGRAM-8 (KEY1 SECTION) <VT-FX7750/5700>

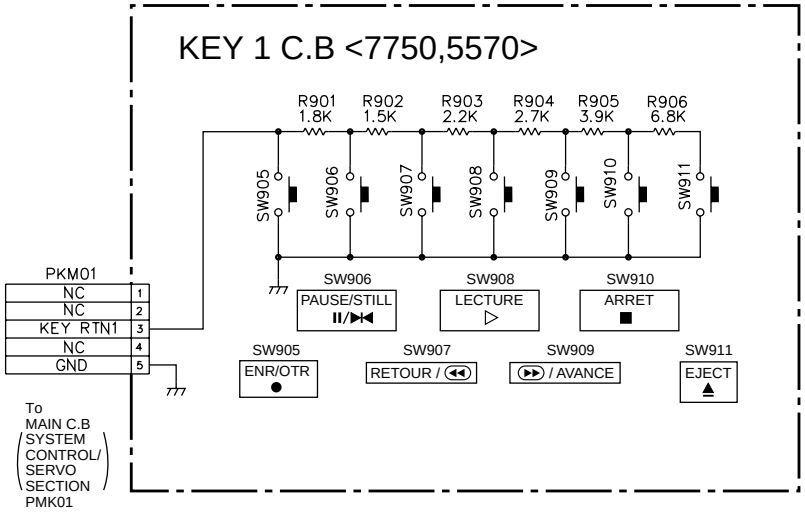

SCHEMATIC DIAGRAM-9 (KEY1 SECTION) <VT-FX990/GX935/915>

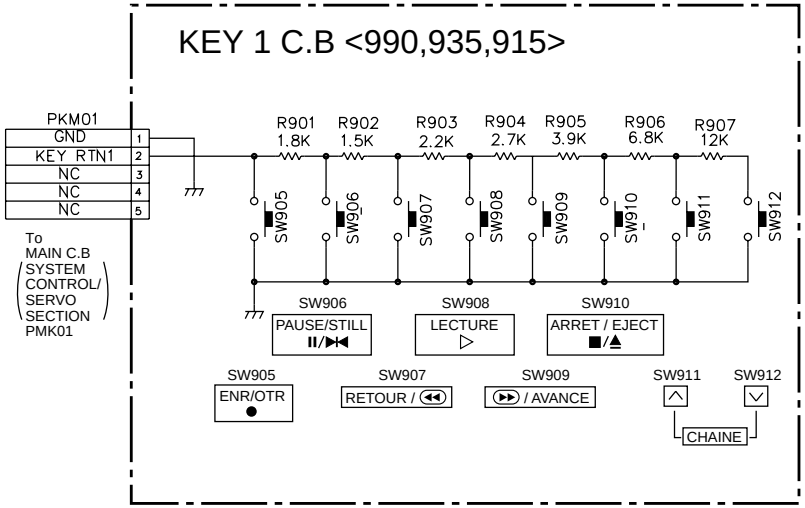

SCHEMATIC DIAGRAM-10 (KEY2 SECTION) <VT-FX7750/5700>

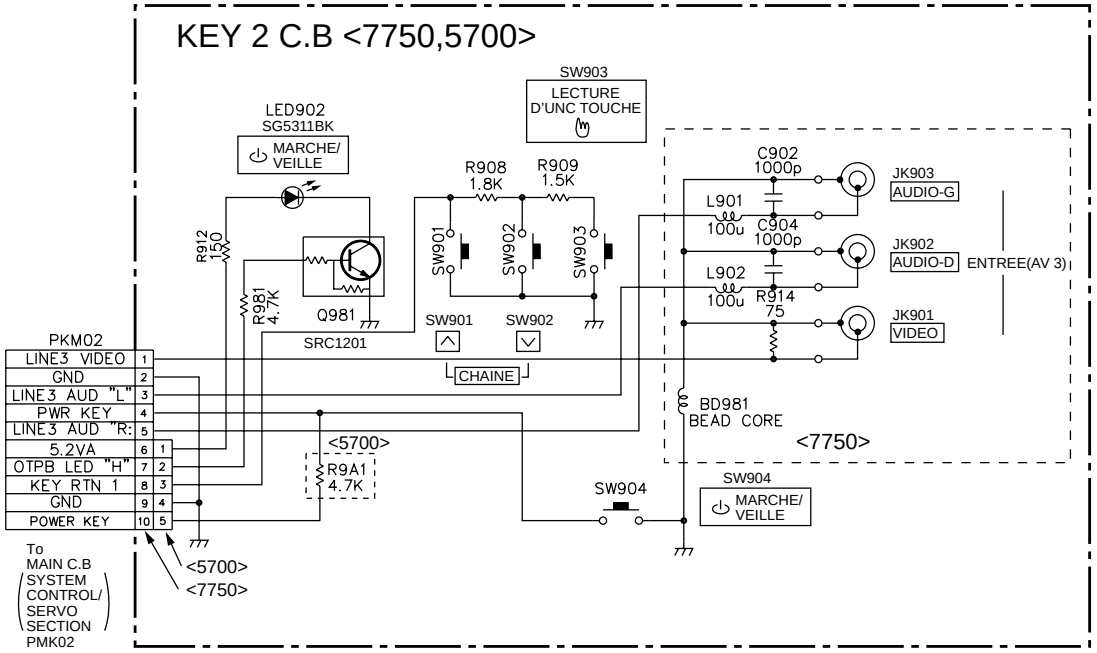

SCHEMATIC DIAGRAM-11 (KEY2 SECTION) <VT-FX990/GX935/915>

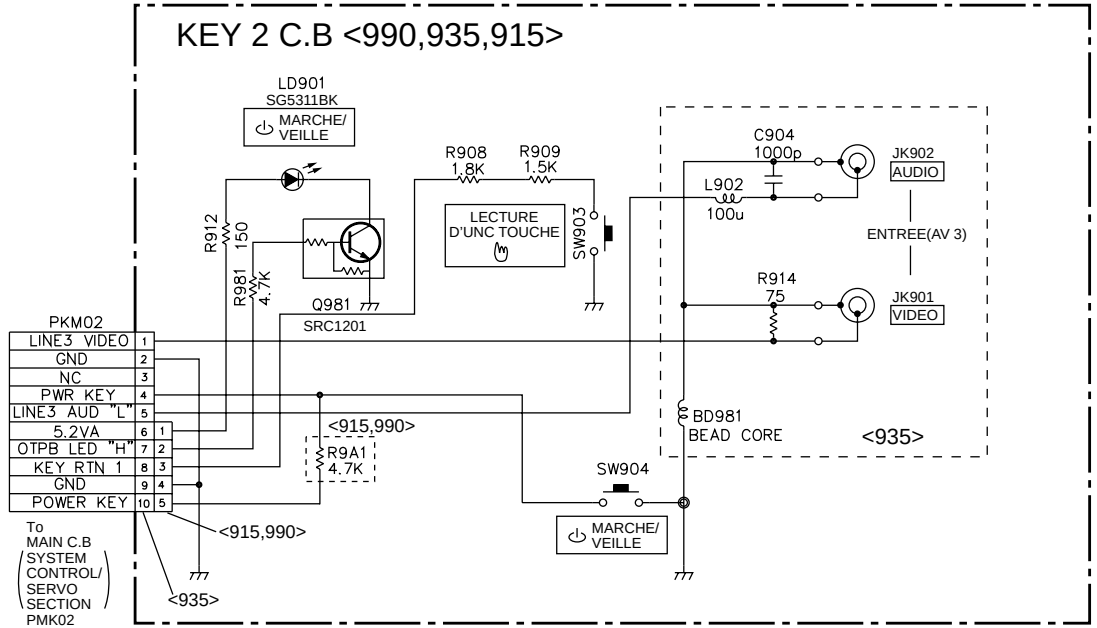

MECHANICAL/MECHANSIM MAIN PARTS LIST 1/1

DESCRIPTIONで判断できない物は "REFERENCE NAME LIST" を参照してください。
If can't understand for Description please kindly refer to "REFERENCE NAME LIST".

REF. NO	PART NO.	KANRI NO.	DESCRIPTION
001	S7-23R-010-4A0		DRUM ASSY SUB D33-2CH<91,93>
001	S7-23R-010-5E0		DRUM ASSY SUB D33-4CH PAL<99>
001	S7-23R-010-6E0		DRUM ASSY SUB D33-6CH PAL<57,77>
001	S8-50R-HG2-2Z0		CABLE,FLAT UL2896
001	——		SPR,BATT-B(N2)
002	S6-80R-B00-04B		MOTOR(MECH)DRUM
003	S9-30R-010-6A0		HOLDER FPC(2CH)<91,93>
003	S9-30R-010-7A0		HOLDER FPC(4CH)<99>
003	S9-30R-010-8A0		HOLDER FPC(6CH)<57,77>
004	S0-06R-002-0A0		CAP,FPC
009	S2-61R-001-7A0		ARM ASSY T/UP(D-33K)<99,57,77>
011	S2-61R-001-8A0		ARM ASSY TENSION (D-33K)
012	S0-41R-000-3A0		BASE ASSY P2
013	S0-41R-000-4A0		BASE ASSY P3
014	S0-41R-000-7A0		BASE ASSY P4
015	S8-70R-000-3A0		OPENER LID
016	S0-41R-000-5F0		BASE ASS A/C HEAD
017	S4-08R-000-1B0		REEL S
018	S9-70R-005-4A0		SPRING SB
019	S4-21R-000-3A0		BRAKE ASSY S
020	S9-70R-005-3A0		SPRING TB
021	S4-21R-000-4A0		BRAKE ASSY T
022	S5-238-33B-000		HEAD FE D33
023	S9-80R-001-0A0		SUPPORTER CST
024	S2-61R-001-3A0		ARM ASSY IDLER
027	S4-70R-002-5A0		GEAR WHEEL
028	S4-08R-000-2B0		REEL T
029	S2-61R-001-1A0		ARM ASSY PINCH
031	S9-70R-006-9A0		SPRING TENSION
032	S1-41R-000-2B0		CHASSIS ASSY D33
051	S4-00R-000-5A0		BELT CAPSTAN
052	S6-80R-A00-03A		MOTOR(MECH)
053	S9-74R-001-8A0		GUIDE RACK F/L
054	S4-70R-003-7A0		GEAR RACK F/L
055	S4-70R-003-3A0		GEAR DRIVE
056	S4-70R-003-2B0		GEAR,CAM
057	S4-70R-003-6B0		GEAR CONNECT
059	S9-70R-005-9A0		SPRING CAPSTAN
060	S5-10R-002-5B0		F/R LEVER
061	S2-65R-000-3A0		CLUTCH ASSY D33K
062	S4-70R-005-8A0		GEAR,UP/D33K
063	S9-70R-005-1A0		SPRING UP/D
064	S4-70R-003-4A0		GEAR SECTOR
077	S3-00R-015-7A0		PLATE SLIDER
078	S5-10R-002-2A0		LEVER TENSION
079	S0-40R-002-1A0		BASE,TENSION(D-33K)
100	S3-01R-003-2A0		PLATE ASSY TOP
101	S8-10R-006-8A0		BRACKET SIDE(L)
104	S9-74R-001-9A0		GUIDE CST
115	S9-70R-005-0A0		SPRING SWITCH
116	S5-10R-002-0A0		LEVER SWITCH
250	S1-10R-012-8U0		CASE,TOP
275	S9-30R-010-2A0		HOLDER LED
283	S5-80R-003-3U0		DOOR CST(915LE)<91>
283	S5-80R-003-3T0		DOOR CST(935LE)<93>
283	S5-80R-003-3S0		DOOR CST(990LE)<99>
283	S5-80R-V00-1F0		DOOR CST(5700LE)<57>
283	S5-80R-V00-1A0		DOOR CST<77>
284	S4-426-81A-000		SPR,DOOR
⚠ 300	S4-10R-CHD-01A		POWER CORD
320	S7-20R-D02-0B0		PANEL DISTRIBUTOR(PAL-SCART<91,93,99>
320	S7-20R-D02-0C0		PANEL DISTRIBUTOR(PAL-2SCART<57,77>
323	S1-11R-008-9B0		CASE ASSY
330	S5-50R-021-0A0		COVER BOTTOM
401	SM-PC0-261-418		SCREW,2.6-4.0
406	87-261-094-410		PAN HEAD SCREW 3-6
409	87-741-095-410		SCREW,PAN HEAD 3.0-8.0
410	SA-PF0-262-218		SCREW,PAN HEAD 2.6-6.8
452	S3-530-51A-000		SCREW,SPECIAL
457	87-741-097-410		SCREW,3-12
462	S3-531-36A-000		SCREW,SPECIAL(FBK)
504	S3-540-01B-000		WASHER,P.S 3.1-6-0.5
517	SW-ZZR-000-4B0		WASHER STOPPER
518	SW-ZZR-000-4A0		WASHER STOPPER
519	SW-ZZR-000-4D0		WASHER STOPPER<99,57,77>
A01	S7-23R-010-2E0		DRUM ASSY D33-4CH LP/21<99>
A01	S7-23R-010-3E0		DRUM ASSY D33-6CH PAL LP/21<57,77>
A02	S2-61R-001-7A0		ARM ASSY T/UP(D-33K)<91,93>
A03	S2-61R-001-5A0		CLEANER ARM ASSY
A04	S8-11R-001-9A0		BRACKET ASSY L/D MOTOR
A11	S4-70R-002-8A0		GEAR ASSY P3
A12	S4-70R-002-6A0		GEAR ASSY P2
A14	S4-21R-000-5C0		CAPSTAN BRAKE ASSY<99,57,77>
A21	S9-31R-003-1A0		HOLDER ASSY
A22	S8-11R-001-8A0		BRACKET ASSY DOOR
A23	S2-61R-001-6A0		ARM ASSY F/L
A43	S7-21R-F13-5A0		PANEL ASSY,FRONT<77>

TYPE	MODEL NAME	SUFFIX
<77>	HV-FX7750	LE
<57>	HV-FX5700	LE
<99>	HV-FX990	LE
<93>	HV-GX935	LE
<91>	HV-GX915	LE

ACCESSORIES LIST

DESCRIPTIONで判断できない物は "REFERENCE NAME LIST" を参照してください。
If can't understand for Description please kindly refer to "REFERENCE NAME LIST".

REF. NO	PART NO.	KANRI NO.	DESCRIPTION
1	S8-35R-P00-54A		INSTRUCTION ASSY CBFA201S NFA1<91>
1	S8-35R-P00-54D		INSTRUCTION ASSY CBFA204S NFA1<93>
1	S8-35R-P00-54E		INSTRUCTION ASSY CBFA404S NFA1<99>
1	S8-35R-P00-54B		INSTRUCTION ASSY CBFA911NS NFA<57>
1	S8-35R-P00-54C		INSTRUCTION ASSY CBFA918NS NFA<77>
2	S7-11R-1P0-24G		REMOTE CONTROLLER ASSY N2<91>
2	S7-11R-1P0-24B		REMOTE CONTROLLER ASSY N2<93>
2	S7-11R-1P0-24A		REMOTE CONTROLLER ASSY N2(BFA9<99,77>
2	S7-11R-1P0-24H		REMOTE CONTROLLER ASSY N2(BFA9<57>
3	S8-610-33B-000		CABLE SET ASSY<57,77>
4	S8-615-05R-000		CABLE ASSY<57,77>
4	S8-615-05B-000		CABLE SET ASSY<91,93,99>
5	S8-610-45F-000		CABLE,COAXIAL 1.2M/M<57,77>
6	S5-640-18B-000		PLUG ASSY PHONO CORD<57,77>

アイワ株式会社〒110-8710 東京都台東区池之端1-2-11 ☎03(3827)3111 (代表)
AIWA CO.,LTD. 2-11, IKENOHATA 1-CHOME, TAITO-KU, TOKYO 110-8710, JAPAN TEL:03 (3827) 3111

931196 Printed in Singapore